

Technical Data Sheet: IB Aluminum Lip Termination Bar

Product Description: IB Aluminum Lip Termination Bar is designed to terminate Single-Ply membrane to parapet walls and other penetrations.



Advantages:

- IB Aluminum Lip Termination Bar is made of extruded aluminum (6063 T6 alloy) with a mill finish
- Oval holes that measure 1/4" x 3/8" are punched into each bar, with a standard spacing of 6", 8" or 12" on center (O.C.)
- IB Aluminum Lip Termination Bar can be made to order with special hole spacing
- IB Aluminum Lip Termination Bar is F.M. and Miami Dade County approved

Installation Instructions: IB Fasteners should be used to secure the termination bar to the wall at no greater spacing than 6" o.c. for most application.

Weight: 1 lb.

Color: Silver.

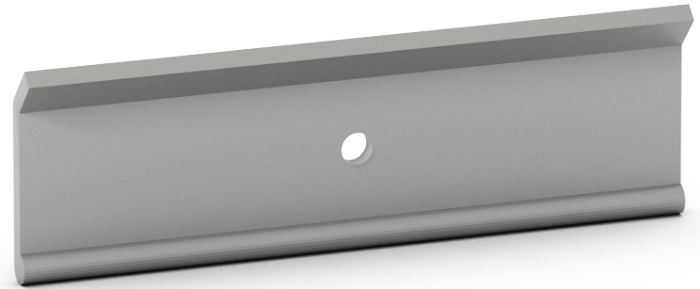

Technical Data Sheet: IB Clad Termination Bar

Product Description: IB Clad Termination Bars are 2" in width and consist of 24 ga. Galvanized/ bonded 25 mil. IB Single Ply membrane that allows for easy application. It can be installed over the membrane (like a traditional termination bar), or installed first to allow for the membrane to be welded directly to for a cleaner application.

Advantages:

- Installed either on top or underneath the roofing membrane
- Clad metal offers better corrosion resistance

Installation Instructions: IB Fasteners should be used to secure the termination bar to the wall at no greater spacing than 12" o.c. for most application. Note: specifier may determine a tighter fastening requirement for some applications.

Weight: 4 lbs.

Color: White or bronze.

